


NOTES:

1. MATERIALS:

- 1.1 HOUSING: PBT+30%G/F,UL94V-0,COLOR: BLACK.
- 1.2 CONTACT: BRASS
- 1.3 BOARD LOCK:BRASS
- 1.4 SHELL:SPCC
- 1.5 RIVET:BRASS
- 1.6 SCREW:BRASS

2. PLATING:

- 2.1 CONTACT:
GOLD FLASH ON CONTACT AREA.
100U" TIN PLATED ON SOLDER TAIL AREA.
50U" NICKEL UNDERPLATING OVERALL.
- 2.2 BOARD LOCK: 100U" MATTE TIN PLATED
50U" NICKEL UNDERPLATING OVERALL.
- 2.3 SHELL:100U" NICKEL PLATING OVREALL
- 2.4 RIVET:100U" NICKEL PLATING OVREALL
- 2.5 SCREW:100U" NICKEL PLATING OVREALL

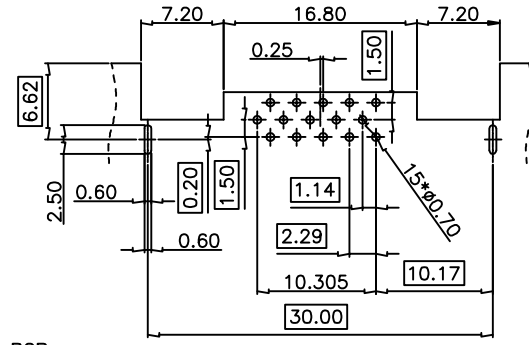

RECOMMENDED PCB LAYOUT
DIMENSION TOLERANCE: ±0.05

PART NO:	MATERIAL	COLOR
20345-T1-09B	PBT	BLACK
20345-T1-09B1	PA9T編織	BLACK

DIMENSIONS
TOLERANCE
METRIC
.0= ±.38
.00= ±.25
.000= ±.15
.0000= ±.
ANG.= ± 2°

尚益科技有限公司 JMSCONN TECHNOLOGY CO., LTD.				
PROJ		SCALE : F DO NOT SCALE DWG	MOLD NO 20345-T1	
APP			MODEL	FILE NO
CHK				REV. X1
DGN			UNIT	SIZE
DRW	HSIEH	2013.09.22	MM	SHT 1 OF 1 A4