










1 2 3 4 5 6 7

A
B
C
D
E

A
B
C
D
E

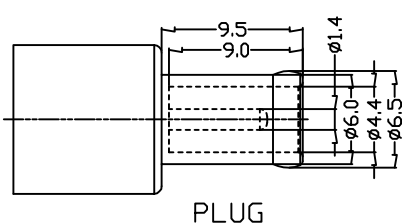


PLUG

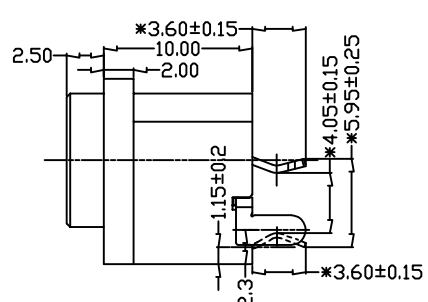

RECOMMENDED PADS LAYOUT
<TOP VIEW>
NOTE:TOLERANCE FOR PCB LAYOUT IS ± 0.05

NOTE:
 DIELECTRIC STRENGTH: AC 500V/min
 INSULATION RESISTANCE: 100M Ω MIN AT DC 500V.
 CONTACT RESISTANCE: 30m Ω MAX.
 Insertion force: 0.30-5.0kgf(1000次).
 Withdrawal force: 0.30-5.0kgf(1000次).
 Δ Retention force: 1.0kgf/Pin(Min)
 帶 * 標注的為重點管控尺寸.



尚益科技有限公司
JMSCONN TECHNOLOGY CO., LTD.

NO	DESCRIPTION	SPECIFICATION	U'T	Q'TY	REMARK
①	BODY	PBT UL94V-0,NO GLASS	EA	1	BLACK
②	SPRING TERMINAL	PHOSPHOR BRONZE C5210	EA	1	Tin plated
③	FIX TERMINAL	BRASS	EA	1	Tin plated
④	TERMINAL	BRASS	EA	1	Tin plated

DIMENSIONS TOLERANCE
 METRIC
 .0 ± 0.20
 .00 ± 0.10
 .000 ± 0.05
 ANG. $=\pm 2^\circ$

PROJ		SCALE : F	MOLD NO	35356		
APP		DO NOT SCALE DWG	MODEL	FILE NO	REV.	
CHK					X1	
DGN			UNIT	SHT 1 OF 1	SIZE	
DRW	Hsieh	2016.11.18	MM		A4	

1 2 3 4 5 6 7