

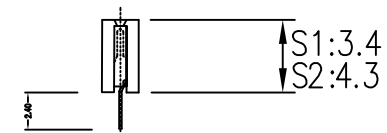

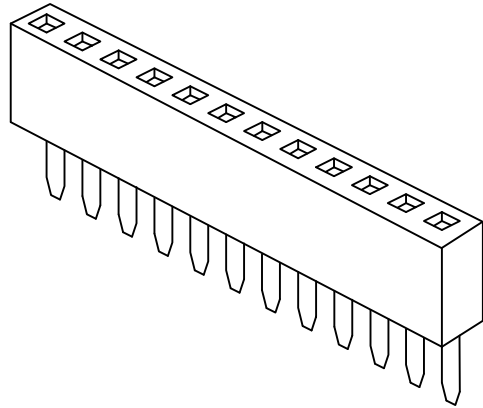


# PIN HEADER

(Pitch:1.27mm)

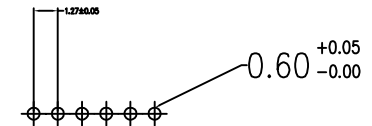

P.C.B LAYOUT

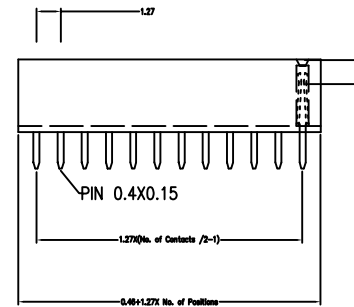

## SPECIFICATIONS

CURRENT RATING:1AMP  
 INSULATOR RESISTANCE:5000MΩ MIN  
 DIELECTRIC WITHSTANDING:AC 500V  
 OPERATING TEMPERATURE:-40 C-+105 C  
 CONTACT MATERIAL:PHOSPHOR BRONZE OR BRONZE  
 INSULATOR MATERIAL:POLYESTER UL94V-0  
 NYLON-6T

FINISH:GOLD FLASH

## ORDER INFORMATION:

12600 1X ?? -S -D1 -G  
 Contact Plating:G:Gold Fflash  
 Pin Height: D1:3.4mm  
 D2:4.3mm  
 S:Straight Type  
 No of Contacts 3~36

尚益科技有限公司  
 JMSCONN TECHNOLOGY CO., LTD.

PROJ		SCALE : F DO NOT SCALE DWG	MOLD NO	12600	
APP			MODEL	FILE NO	REV.
CHK				FEMALE HEADER P:1.27MM SINGLE ROW STRAIGHT	X1
DGN			UNIT	SIZE	
DRW	SHIEH	2010.10.28	MM	SHT 1 OF 1	A4