

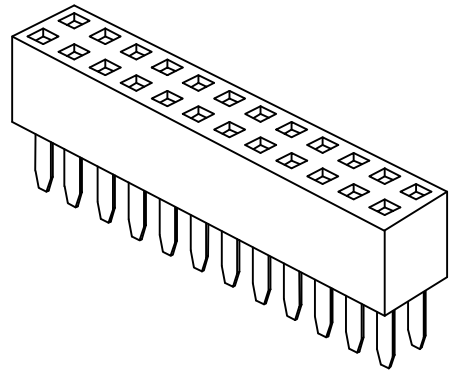




PIN HEADER

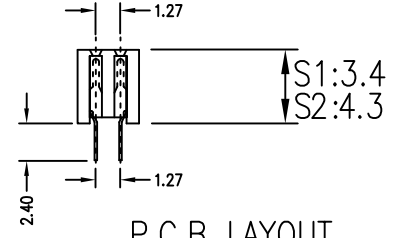

(Pitch:1.27mm)

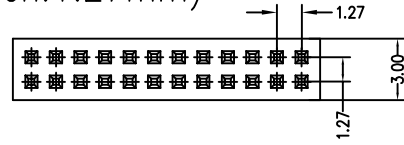

P.C.B LAYOUT

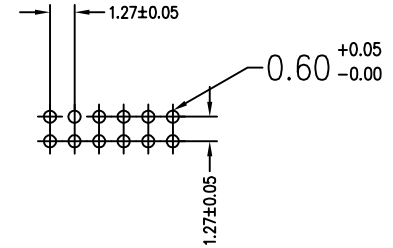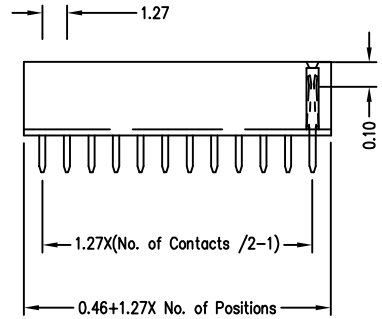

SPECIFICATIONS

CURRENT RATING:1AMP
 INSULATOR RESISTANCE:5000MΩMIN
 DIELECTRIC WITHSTANDING:AC 500V
 OPERATING TEMPERATURE:-40°C~+105°C
 CONTACT MATERIAL:PHOSPHOR BRONZE OR BRONZE
 INSULATOR MATERIAL:POLYESTER UL94V-0
 NYLON-6T
 FINISH:GOLD FLASH

ORDER INFORMATION:

12700 2X ?? -S1 -D1 -G
 Contact Plating:G:Gold Fflash
 Base Height:D1:3.4mm
 D2:4.3mm
 S1:Straight Type
 No of Contacts 3~50

尚益科技有限公司 JMSCONN TECHNOLOGY CO., LED.					
PROJ		SCALE : F DO NOT SCALE DWG	MOLD NO 12700		
APP			MODEL	FILE NO	REV. X1
CHK	CCJ	91.11.05	UNIT MM	SHT 1 OF 1	SIZE A4
DGN	AMY	91.11.05			
DRW	SHIEH	91.11.05			