
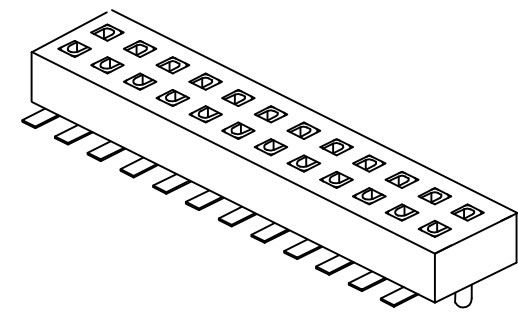


1 2 3 4 5 6 7

A

1.27*1.27 mm Dual Row/SMT Type


A

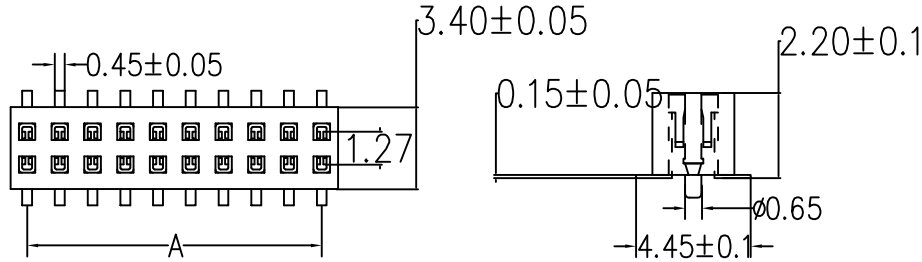

B

A=1.27X(No. of Contacts/2-1)
 B=1.27X(No. of Contacts/2-2)
 C=0.40+1.27X No. of Positions

P.C.B LAYOUT

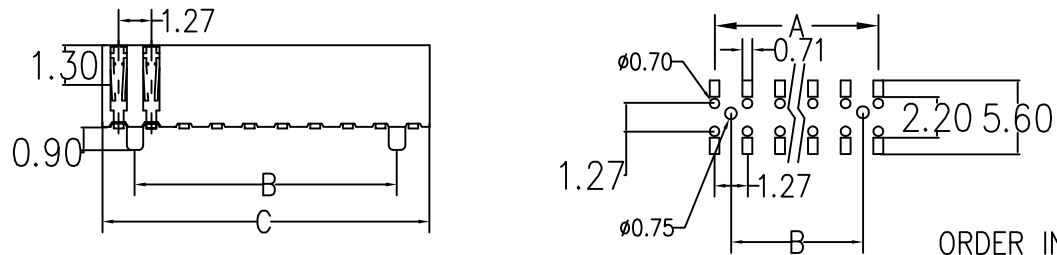

C

ORDER INFORMATION:

12702- 2X ?? -HS -D1 -G -0

- 0:W/O Locating Pegs
- 1:With Locating Pegs
- Contact Plating:G:Gold Fflash
- Height:D1:2.2mm
- HS:SMT Type
- No of Contacts 3~50

D

SPECIFICATIONS
 CURRENT RATING:1AMP
 INSULATOR RESISTANCE:5000MΩMIN
 DIELECTRIC WITHSTANDING:AC 500V
 OPERATING TEMPERATURE:-40°C--+105°C
 MAX PROCESSING TEMP:230° for 30SECONDS
 CONTACT MATERIAL:PHOSPHOR BRONZE OR BRONZE
 INSULATOR MATERIAL:POLYESTER UL94V-0
 NYLON-6T
 FINISH:GOLD FLASH

尚益科技有限公司
 JMSSCONN TECHNOLOGY CO., LTD.

PROJ		SCALE : F DO NOT SCALE DWG	MOLD NO 12702		
APP			MODEL	FILE NO	REV. X1
CHK			UNIT	SHT 1 OF 1	SIZE A4
DGN			MM		
DRW	HSIEH	2012.07.20			

E

1 2 3 4 5 6 7