


1 2 3 4 5 6 7

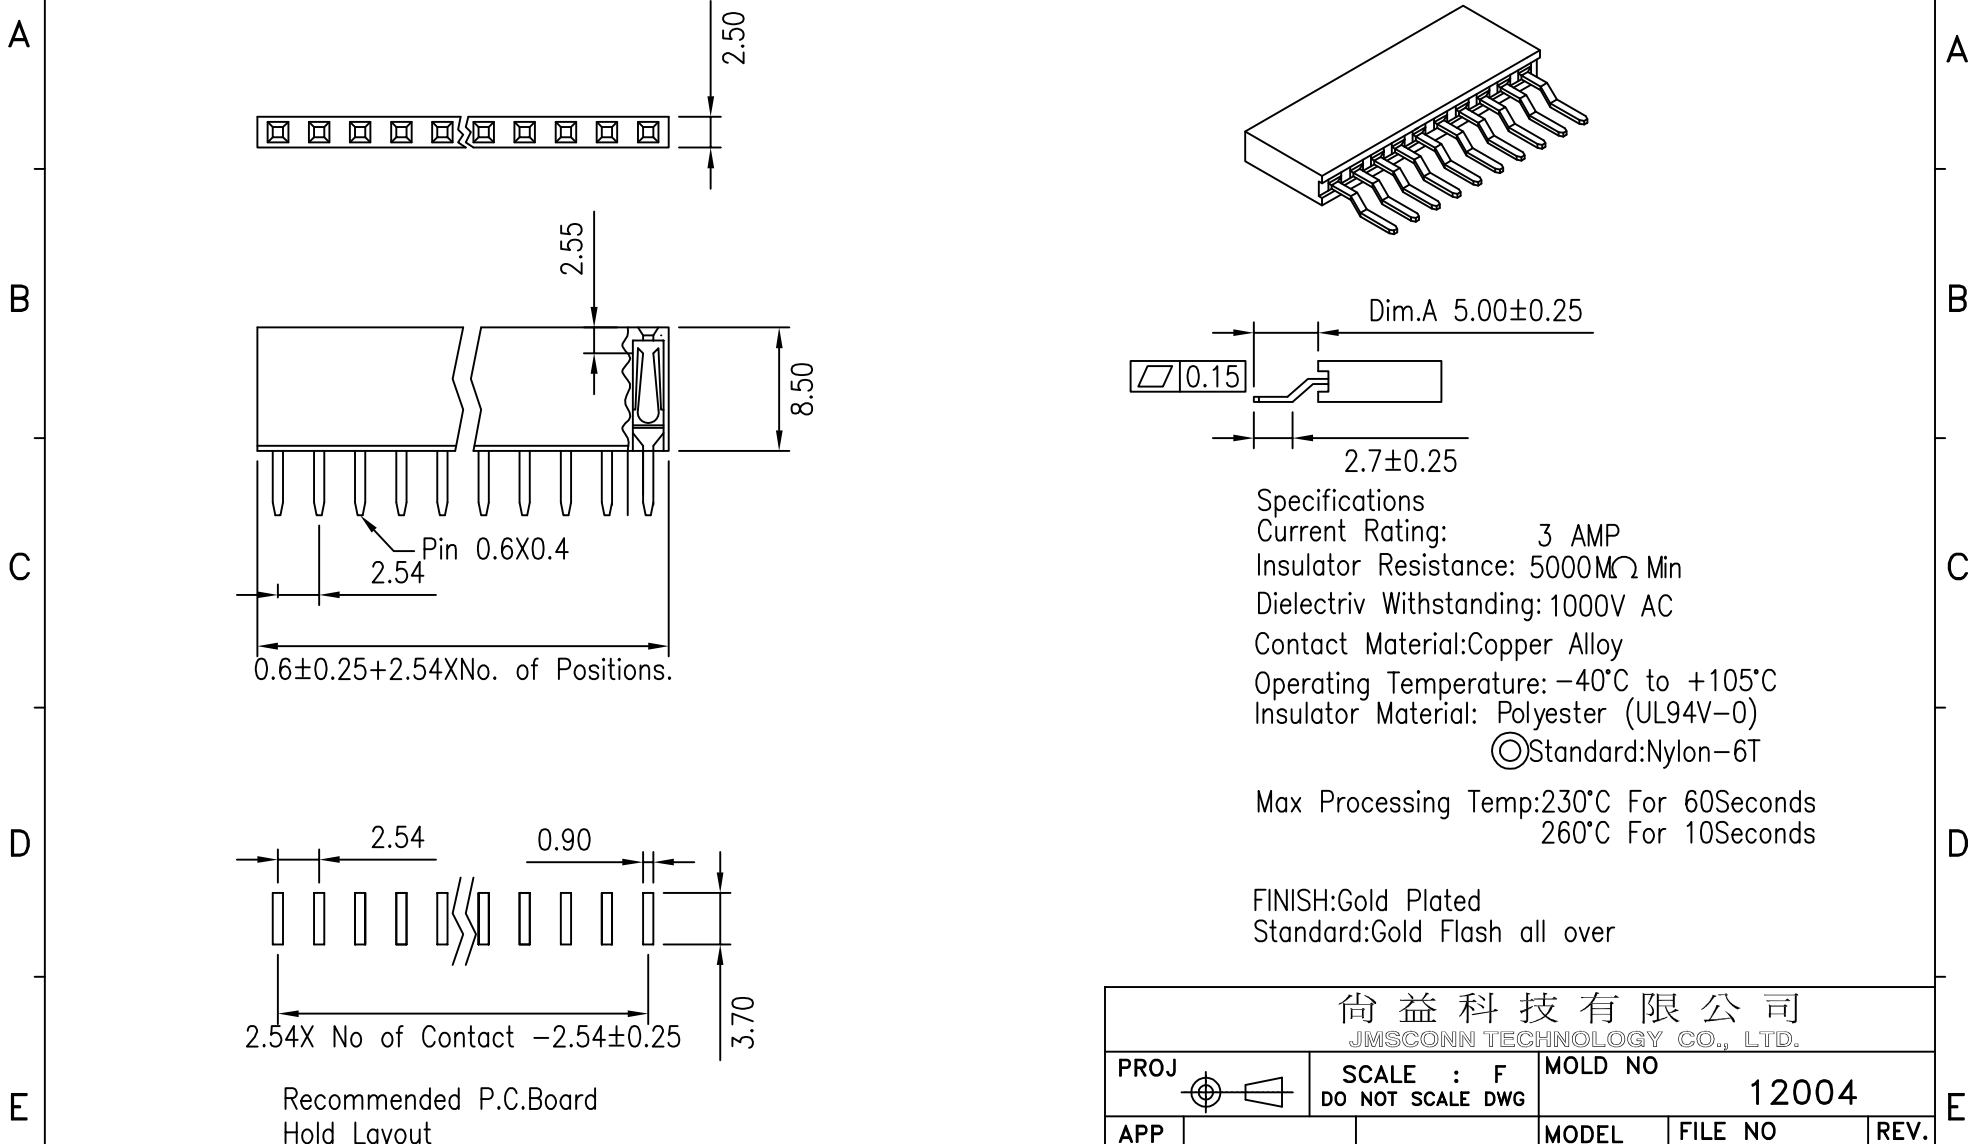

Specifications
 Current Rating: 3 AMP
 Insulator Resistance: 5000MΩ Min
 Dielectriv Withstanding: 1000V AC
 Contact Material: Copper Alloy
 Operating Temperature: -40°C to +105°C
 Insulator Material: Polyester (UL94V-0)
 ◎Standard: Nylon-6T
 Max Processing Temp: 230°C For 60Seconds
 260°C For 10Seconds

FINISH: Gold Plated
 Standard: Gold Flash all over

Recommended P.C.Board
 Hold Layout

尚益科技有限公司 JMSSCONN TECHNOLOGY CO., LTD.					
PROJ		SCALE : F DO NOT SCALE DWG	MOLD NO 12004		
APP			MODEL	FILE NO	REV. X1
CHK					
DGN			UNIT	SHT 1 OF 1	SIZE A4
DRW	HSIEH	2015.03.19	MM		

1 2 3 4 5 6 7