
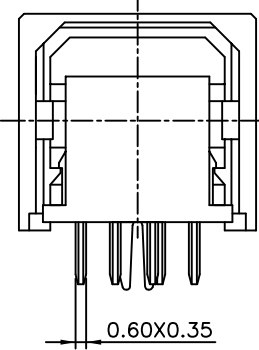


P.C.B. RECOMMEND LAYOUT  
(BOTTOM VIEW)

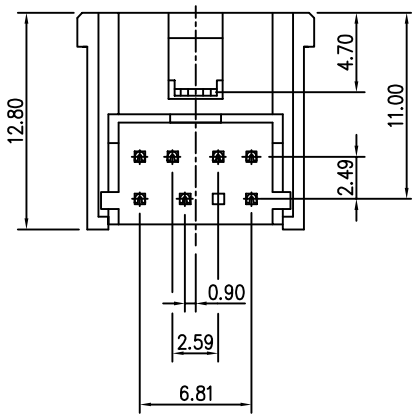

- NOTES:
- MATERIAL :  
HOUSING : THERMOPLASTIC, GLASS FIBER FILLED  
UL 94V-0 RATED.  
CONTACT : PHOSPHOR BRONZE  
INNER SHIELD : SPCC
  - FINISH :  
CONTACT : UNDER PLATED 50u"MIN. NICKEL, OVER ALL  
120u" MIN. TIN IN SOLDERING AREA,  
SELECTIVE GOLD PLATED IN CONTACT AREA.  
INNER SHIELD : L: BRIGHT TIN , PLATED WITH 120u"THICK.  
OVER 50u" THICKNESS Ni.  
S: TIN , PLATED WITH 120u"THICK.  
OVER 100u" THICKNESS Cu.  
N: NICKEL , PLATED WITH 120u"THICK.  
OVER 100u" THICKNESS Cu.  
G: GOLD FLASH , OVER 100u" THICKNESS Cu.

<b>尚益科技有限公司</b> <b>JMSCONN TECHNOLOGY CO., LED.</b>					
PROJ		SCALE : F	MOLD NO		REV.
APP		DO NOT SCALE DWG	30001-7-03		
CHK	CCJ	91.01.16	MODEL	FILE NO	X1
DGN	AMY	91.01.16	UNIT	SHT 1 OF 1	SIZE A4
DRW	SHIEH	91.01.16	MM		