

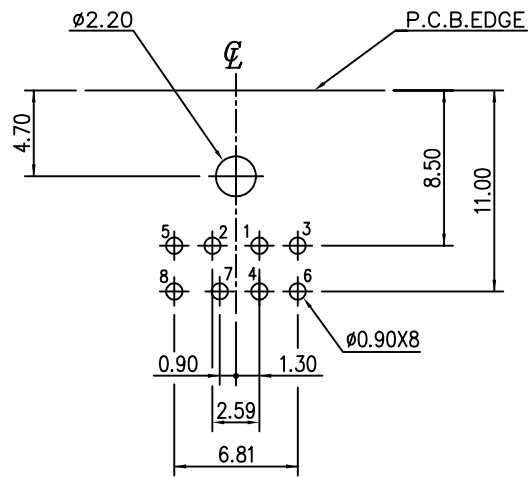

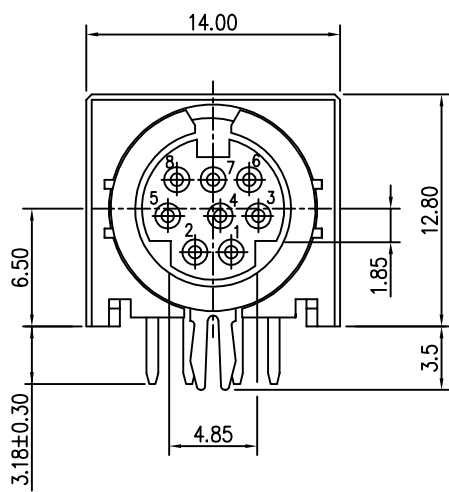


1 2 3 4 5 6 7

A
B
C
D
E

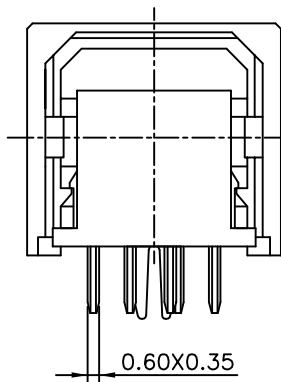

P.C.B. RECOMMEND LAYOUT
(BOTTOM VIEW)

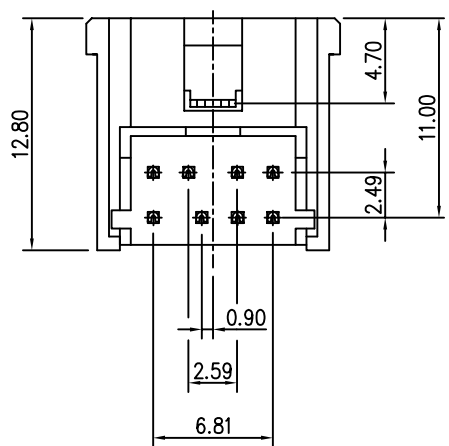

NOTES:

1. MATERIAL :
 HOUSING : THERMOPLASTIC, GLASS FIBER FILLED
 UL 94V-0 RATED.
 CONTACT : PHOSPHOR BRONZE
 INNER SHIELD : SPCC
2. FINISH :
 CONTACT : UNDER PLATED 50u"MIN. NICKEL, OVER ALL
 120u" MIN. TIN IN SOLDERING AREA,
 SELECTIVE GOLD PLATED IN CONTACT AREA.
 INNER SHIELD : L: BRIGHT TIN , PLATED WITH 120u"THICK.
 OVER 50u" THICKNESS Ni.
 S: TIN , PLATED WITH 120u"THICK.
 OVER 100u" THICKNESS Cu.
 N: NICKEL , PLATED WITH 120u"THICK.
 OVER 100u" THICKNESS Cu.
 G: GOLD FLASH , OVER 100u" THICKNESS Cu.

尚益科技有限公司
JMSCONN TECHNOLOGY CO., LED.

PROJ		SCALE : F DO NOT SCALE DWG	MOLD NO 30001-8-03
APP			MODEL
CHK	CCJ	91.01.16	FILE NO
DGN	AMY	91.01.16	REV. X1
DRW	SHIEH	91.01.16	UNIT MM
			SHT 1 OF 1
			SIZE A4

1 2 3 4 5 6 7