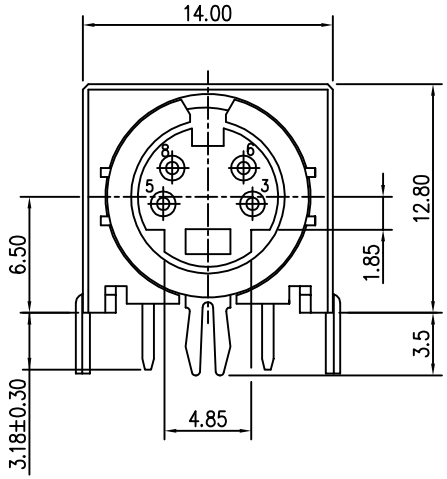



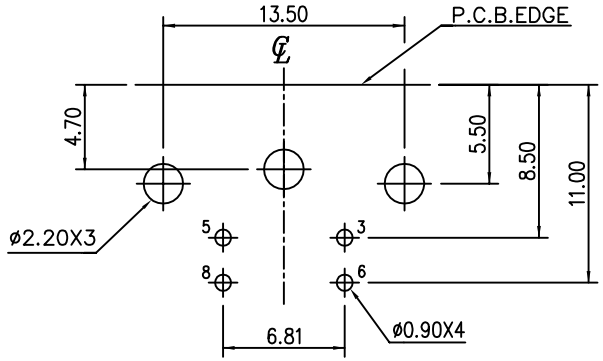

P.C.B. RECOMMEND LAYOUT
(BOTTOM VIEW)

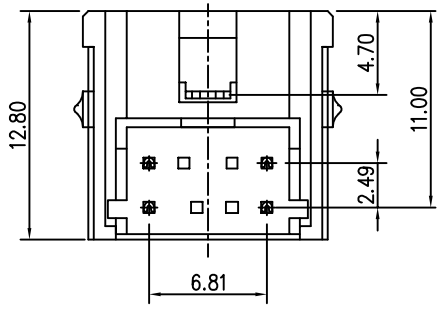

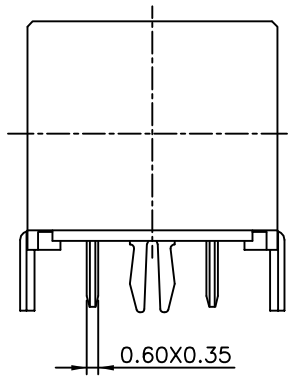

NOTES:
1. MATERIAL :
   HOUSING : THERMOPLASTIC, GLASS FIBER FILLED UL 94V-0 RATED.
   CONTACT : PHOSPHOR BRONZE
   OUTER SHIELD : SPCC
   INNER SHIELD : SPCC
2. FINISH :
   CONTACT : UNDER PLATED 50u"MIN. NICKEL ,OVER ALL 120u" MIN. TIN IN SOLDERING AREA, SELECTIVE GOLD PLATED IN CONTACT AREA.
   OUTER SHIELD : L: BRIGHT TIN , PLATED WITH 120u"THICK, OVER 50u" THICKNESS Ni.
   S: TIN , PLATED WITH 120u"THICK. OVER 100u" THICKNESS Cu.
   N: NICKEL , PLATED WITH 120u"THICK. OVER 100u" THICKNESS Cu.
   G: TIN , PLATED WITH 120u"THICK, OVER 100u" THICKNESS Cu.

   INNER SHIELD : L: BRIGHT TIN , PLATED WITH 120u"THICK. OVER 50u" THICKNESS Ni.
   S: TIN , PLATED WITH 120u"THICK. OVER 100u" THICKNESS Cu.
   N: NICKEL , PLATED WITH 120u"THICK. OVER 100u" THICKNESS Cu.
   G: GOLD FLASH , OVER 100u" THICKNESS Cu.

尚益科技有限公司
JMSCONN TECHNOLOGY CO., LED.

PROJ	SCALE : F DO NOT SCALE DWG		MOLD NO 30010-4-03		
APP			MODEL	FILE NO	REV. X1
CHK	CCJ	91.01.16			
DGN	AMY	91.01.16	UNIT MM	SHT 1 OF 1	SIZE A4
DRW	SHIEH	91.01.16			