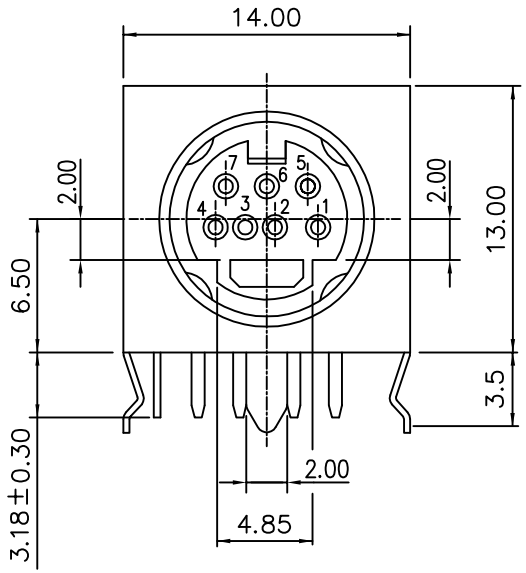

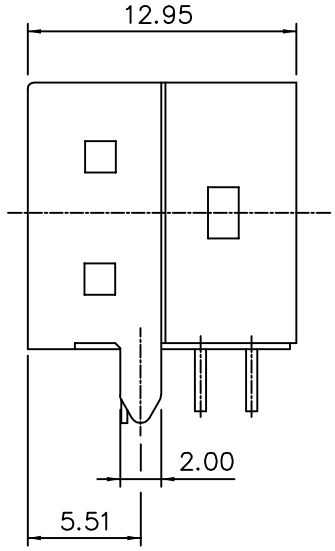

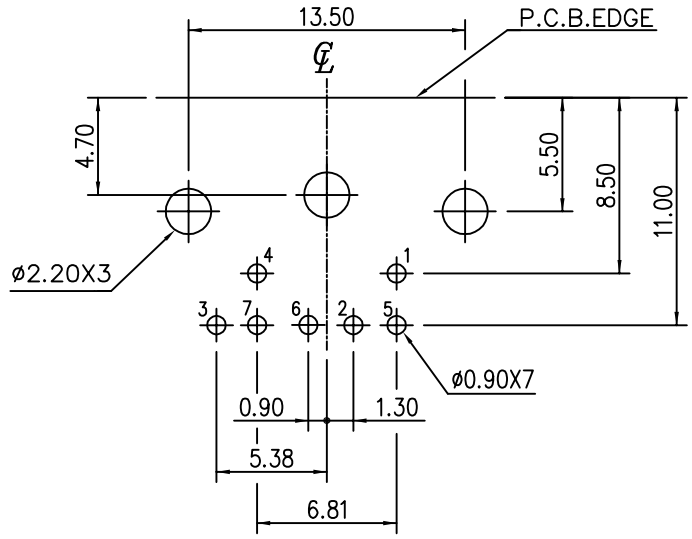

P.C.B. RECOMMEND LAYOUT
(BOTTOM VIEW)

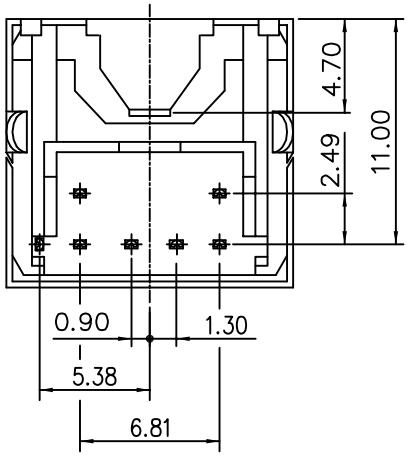

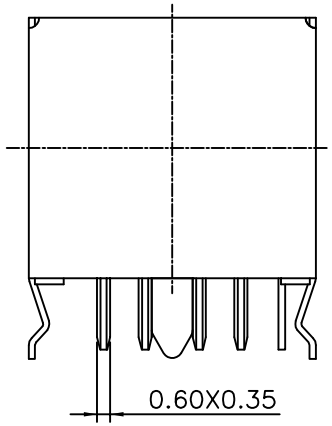

NOTE:
1. MATERIAL :
   HOUSING : THERMOPLASTIC, GLASS FIBER FILLED UL 94V-0 RATED.
   CONTACT : PHOSPHOR BROZEN
   SHIELD : BRASS
2. FINISH :
   CONTACT : UNDER PLATED 50u"MIN. NICKEL, OVER ALL 120u" MIN. TIN IN SOLDERING AREA, SELECTIVE GOLD PLATED IN CONTACT AREA.
   SHIELD : L: BRIGHT TIN , PLATED WITH 120u"THICK. OVER 50u"THICKNESS Ni.
   S: TIN , PLATED WITH 120u"THICK, OVER 100u"THICKNESS Cu.
   N: NICKEL , PLATED WITH 120u"THICK, OVER 100u"THICKNESS Cu.

尚益科技有限公司 JMSCONN TECHNONOGY CO., LED.					
PROJ	SCALE : F DO NOT SCALE DWG		MOLD NO 30020-7-03K		
APP			MODEL 21-001B	FILE NO	REV. X1
CHK	CCJ	91.02.22			
DGN	AMY	91.02.22	UNIT MM	SHT 1 OF 1	SIZE A4
DRW	SHIEH	91.02.22			