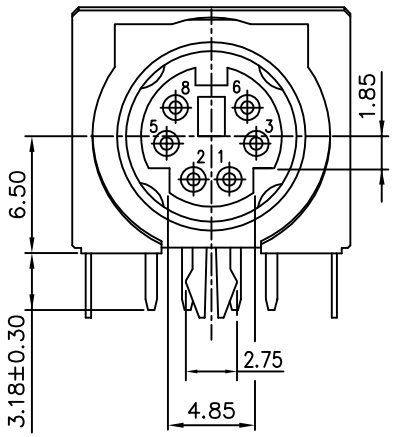

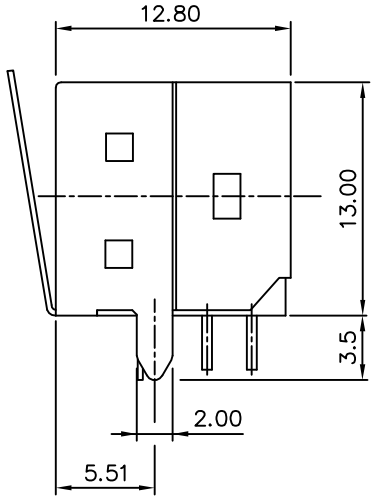

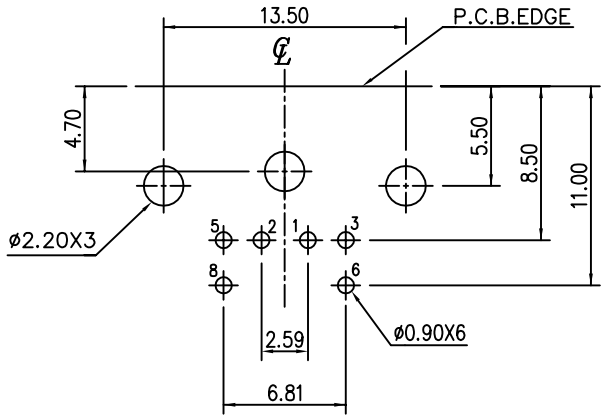

P.C.B. RECOMMEND LAYOUT
(BOTTOM VIEW)

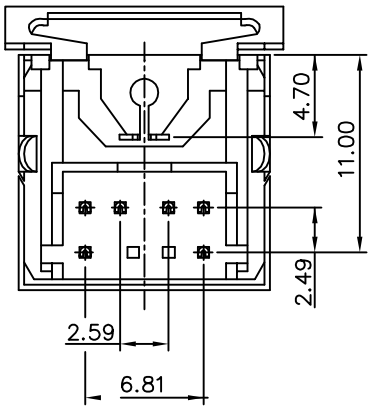

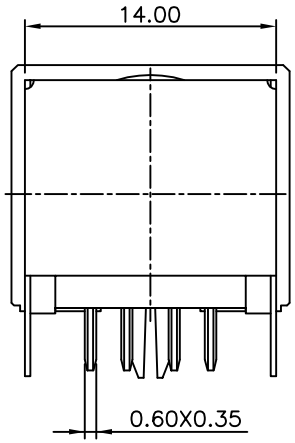

NOTES:
1. MATERIAL :
   HOUSING : THERMOPLASTIC, GLASS FIBER FILLED
   UL 94V-0 RATED.
   CONTACT : PHOSPHOR BRONZE
   SHIELD : BRASS
   GROUNDING: STAINLESS STEEL

2. FINISH :
   CONTACT : UNDER PLATED 50u"MIN. NICKEL, OVER ALL
   120u" MIN. TIN IN SOLDERING AREA,
   SELECTIVE GOLD PLATED IN CONTACT AREA.
   SHIELD : L: BRIGHT TIN , PLATED WITH 120u"THICK.
   OVER 50u"THICKNESS Ni.
   S: TIN , PLATED WITH 120u"THICK,
   OVER 100u"THICKNESS Cu.
   N: NICKEL , PLATED WITH 120u"THICK,
   OVER 100u"THICKNESS Cu.

尙益科技有限公司 JMSCONN TECHNOLOGY CO., LED.					
PROJ	SCALE : F DO NOT SCALE DWG		MOLD NO 30020-6-03S		
APP			MODEL	FILE NO	REV. X1
CHK	CCJ	91.01.16			
DGN	AMY	91.01.16	UNIT MM	SHT 1 OF 1	SIZE A4
DRW	SHIEH	91.01.16			