
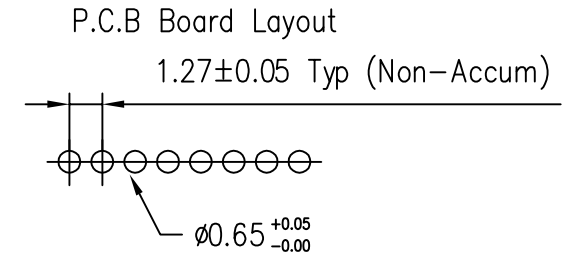
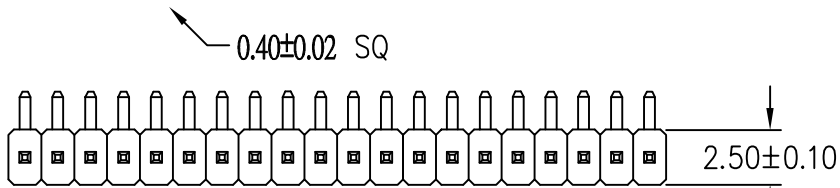
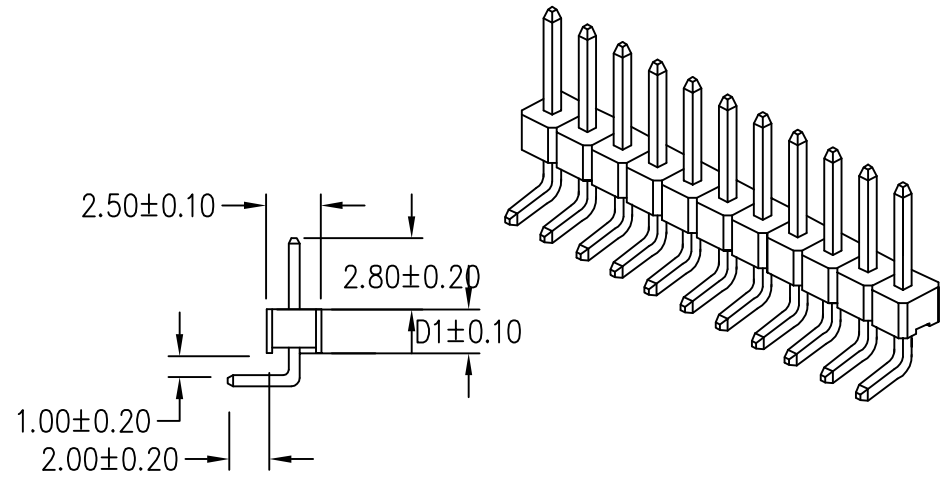


PIN HEADER

1.27mm Single Row/Right Angle

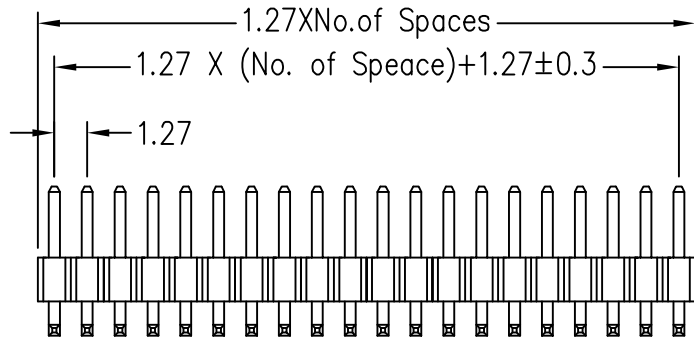

SPECIFICATIONS

CURRENT RATING:1AMP
 INSULATOR RESISTANCE:5000MΩMIN
 DIELECTRIC WITHSTANDING:AC 500V
 OPERATING TEMPERATURE:-40°C-+105°C
 CONTACT MATERIAL:PHOSPHOR BRONZE OR BRONZE
 INSULATOR MATERIAL:POLYESTER UL94V-0
 NYLON-6T

FINISH:GOLD FLASH

11630 -1 X ?? -R -D1 -L1
 Pin Length:L1:A:2.0mm/B:2.8mm
 Height: D1:1.40mm
 D2:1.70mm
 D3:2.50mm
 R:Right Angle
 No of Contacts 2~50
 Single Row

尚益科技有限公司
 JMSSCONN TECHNOLOGY CO., LED.

PROJ		SCALE : F DO NOT SCALE DWG	MOLD NO	11630	
APP			MODEL	FILE NO	REV. X1
CHK	CCJ	91.10.07	UNIT	MM	SHT 1 OF 1
DGN	AMY	91.10.07			
DRW	SHIEH	91.10.07			SIZE A4