

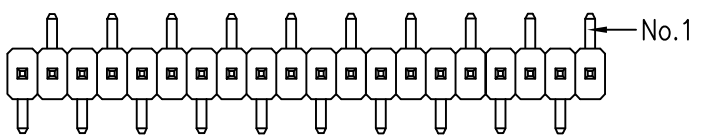
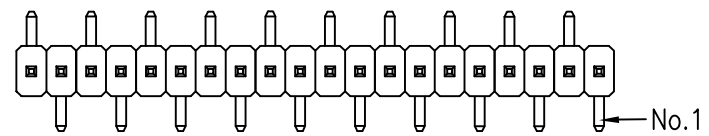
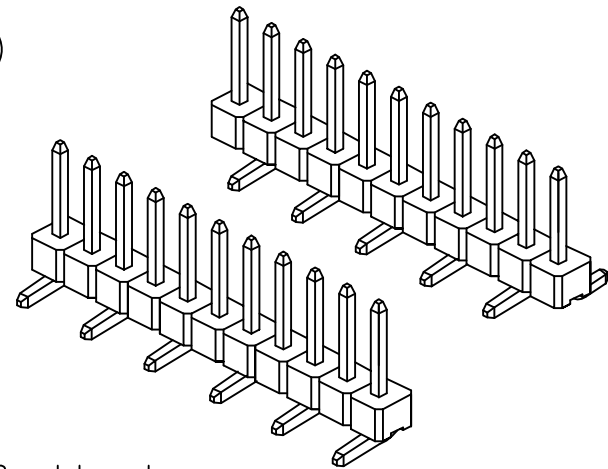



PIN HEADER

(SMT TYPE Pitch:1.27mm)

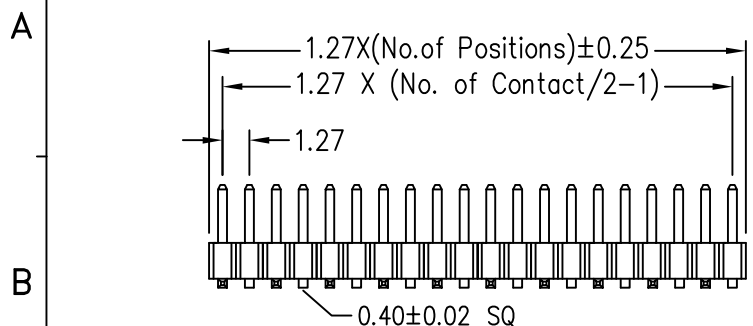

P.C.B Board Layout

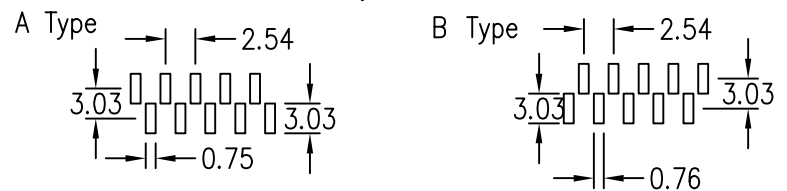

ORDER INFORMATION:

11660-1 X ?? -HSA -D1 -L1
 Pin Length: L1: 2.8mm
 L2: 6.0mm
 Height: D1: 1.40mm
 D2: 1.70mm
 HSA: SMT/A Type
 HSB: SMT/B Type
 No of Contacts 2~50
 Single Row

SPECIFICATIONS

CURRENT RATING: 1AMP
 INSULATOR RESISTANCE: 5000MΩMIN
 DIELECTRIC WITHSTANDING: AC 500V
 OPERATING TEMPERATURE: -40°C~+105°C
 CONTACT MATERIAL: PHOSPHOR BRONZE OR BRONZE
 INSULATOR MATERIAL: POLYESTER UL94V-0
 NYLON-6T
 FINISH: GOLD FLASH

尚益科技有限公司
 JMSSCONN TECHNOLOGY CO., LTD.

PROJ		SCALE : F DO NOT SCALE DWG	MOLD NO	11660	
APP			MODEL	FILE NO	REV.
CHK	CCJ	90.11.29		P: 1.27MM(SMT)	X1
DGN	AMY	90.11.29	UNIT		SIZE
DRW	SHIEH	90.11.29	MM	SHT 1 OF 1	A4