
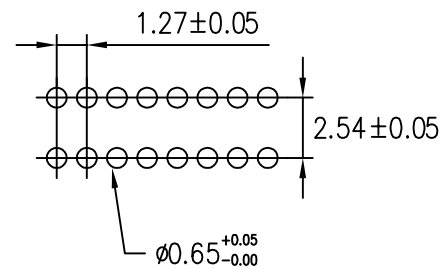
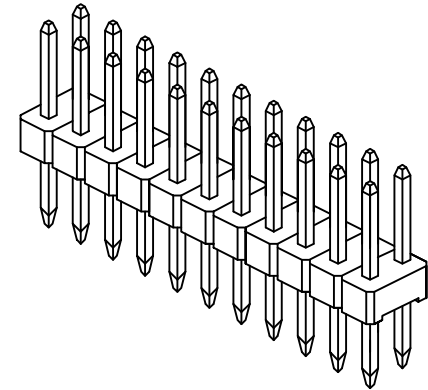
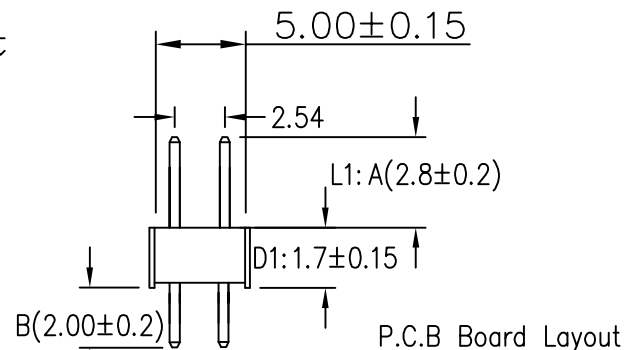


PIN HEADER

Dual Row/Straight

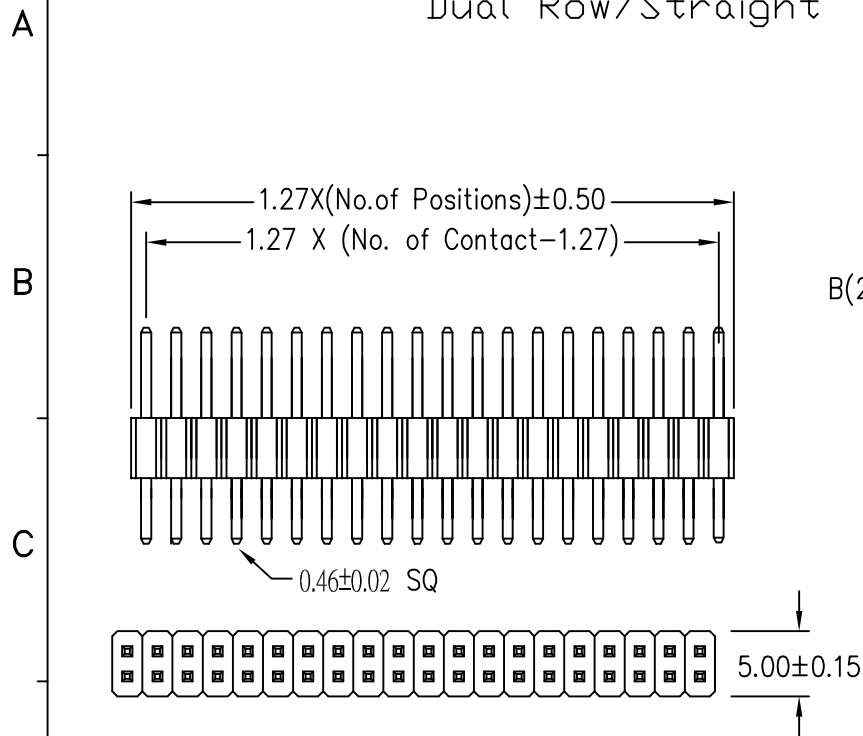

ORDER INFORMATION:

11800 - 2 X ?? -S -D1 -L1

Pin Length: L1: A:2.8mm/B:2.0mm
L2: A:6.0mm/B:3.0mm
Height: D1:1.70mm
D2:2.50mm

S: Straight
No of Contacts 2~50
Dual Row

SPECIFICATIONS

CURRENT RATING: 1AMP
INSULATOR RESISTANCE: 5000MΩMIN
DIELECTRIC WITHSTANDING: AC 500V
OPERATING TEMPERATURE: -40°C--+105°C
CONTACT MATERIAL: PHOSPHOR BRONZE OR BRONZE
INSULATOR MATERIAL: POLYESTER UL94V-0
NYLON-6T

FINISH: GOLD FLASH

尚益科技有限公司

JMSCONN TECHNOLOGY CO., LTD.

PROJ		SCALE : F DO NOT SCALE DWG	MOLD NO	11800	
APP			MODEL	FILE NO	REV.
CHK				1.27*2.54mm	X1
DGN			UNIT	SHT 1 OF 1	SIZE
DRW	HSIEH	2016.11.28	MM		A4