
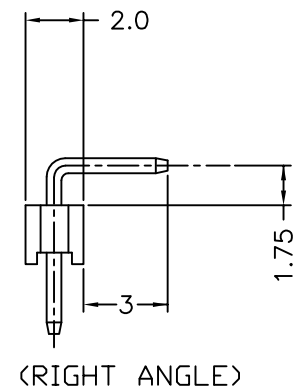
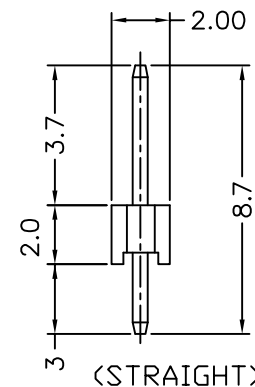


NOTE: 2~40 POSITION

Specifications:

- Insulator Material: PBT & 30% Glass Fiber(UL 94V-0)
- Contact Resistance: 30MΩ Max at DC 100MA
- Insulator Resistance: 1000MΩ Min at DC 500 V
- Current Rating: 1 AMP
- Dielectric Withstanding Voltage: AC 500V For 1 minute
- Temperature Rating: -55°C ~ +105°C
- Contact Material: Phosphor Brass
- Tolerance: ±0.3

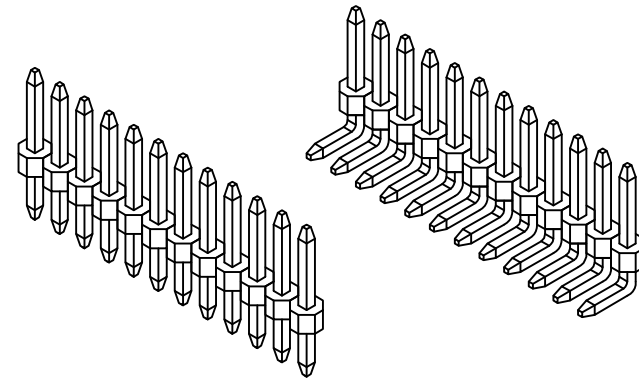

尚益科技有限公司 JMSCONN TECHNOLOGY CO., LED.					
PROJ	SCALE : F DO NOT SCALE DWG		MOLD NO 11300		
APP			MODEL	FILE NO	REV. X1
CHK					
DGN			UNIT	SHT 1 OF 1	SIZE A4
DRW	SHIEH	2007.11.06	MM		