


Green Product

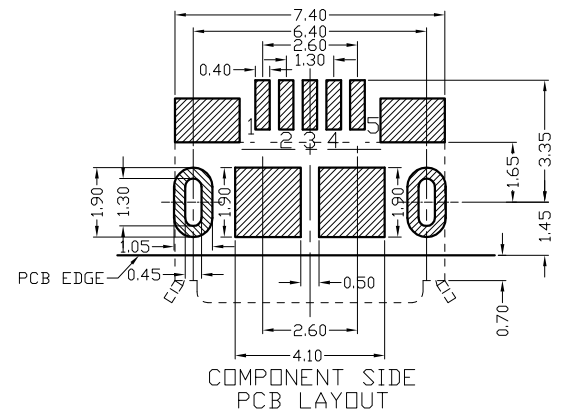

Specification:

- *Contact Resistance:
 - (1)30m Ohm Max. at 100mA
 - (2)10,000 Cycles After: 40m Ohm Max.at 100mA
- *Rated Voltage: AC 30V
- *Contact Current Rating:
 - (1)Signal Line: 1A/Pin (No. 1 to 5)
 - (2)2-Line For Power: 1.8A/Pin(No. 1 and 5),0.5A/Pin(No. 2 to 4)
- *Insulation Resistance: 100M Ohm Min. At 500V DC
- *Dielectric Withstanding Voltage: 100V AC for 1 Minute
- *Durability (Life Test): 10,000 Cycles Front
- *Insertion Force: 35 Newton Maximum
- *Extraction Force: 8 Newton Minimum.
- *Operating Temperature: -30°C to +80°C
- *Solderability: 260°C±5°C;5 Sec

NO	NAME	MATERIAL	FINISH	Q'TY	REMARK
1	HOUSING	LCP+GF30%	BLACK	1	
2	PIN TERM.	PHOS.BRONZE(EH) ±0.20mm	GOLD PLATED	5	All Area: Gold 1u'
3	SHELL	STAINLESS T=0.25	TIN PLATED(MATTE Sn)	1	TIN: 120~200u'

尚益科技有限公司					
JMSCONN TECHNOLOGY CO., LTD.					
PROJ		SCALE : F	MOLD NO	20084-S6	
		DO NOT SCALE DWG			
APP			MODEL	FILE NO	REV. X1
CHK	HSIEH	2016.05.16			
DGN	HSIEH	2011.02.09	UNIT		SIZE A4
DRW	HSIEH	2011.02.09	MM	SHT 1 OF 1	