



1 2 3 4 5 6 7

A



PIN	SIGNAL ASSIGNMENT
PIN 1	VBUS
PIN 2	D-
PIN 3	D+
PIN 4	GND
PIN 5	StdA-SSRX-
PIN 6	StdA-SSRX+
PIN 7	GND-DRAIN
PIN 8	StdA-SSTX-
PIN 9	StdA-SSTX+


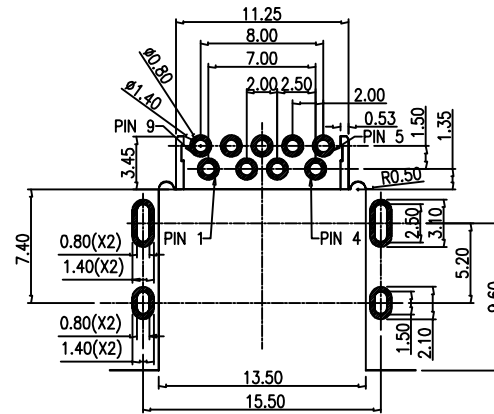


RECOMMENDED P.C.B LAYOUT (COMPINE)  
P.C.B THICKNESS=1.20mm (TOLERANCE  
WITHOUT LOCKING FUNCTION  
PLASTIC STAND OFF

Remark:




1. MATERIAL:
  - 1.1 Housing: NY9T+30%G.F BLUE or BLACK.
  - 1.2 Contact: C5191 (T 0.2mm)  
1u" Au PLATED ON CONTACT AREA,  
60u" TIN PLATED ON SOLDER TAILS;  
40u" Ni UNDERPLATED OVER ALL .
  - 1.3 Shell: SUS (T 0.3mm),  
50u" BLACK NICKEL PLATED.
2. Characteristics:
  - 2.1 Rating Voltage : 30V AC.
  - 2.2 Rating Current: 1.5 AMP
  - 2.3 Contact Resistance: 30 mΩ MAX.
  - 2.4 Insulation Resistance: 1000 MΩ MIN.
  - 2.5 Withstanding Voltage: AC 500V.
  - 2.6 Mating force: 3.57kg MAX.
  - 2.7 Extraction force: 1.02kg MIN.
  - 2.8 Life test: 5000Cycles.
  - 2.9 Temperature Range: -55°C~+85°C.

B

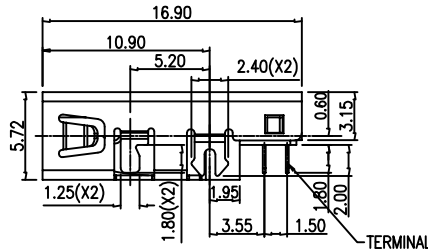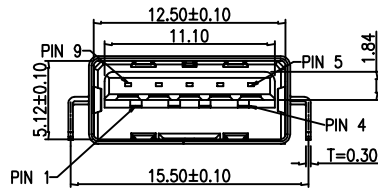

C

D

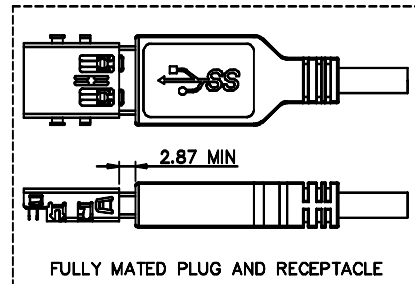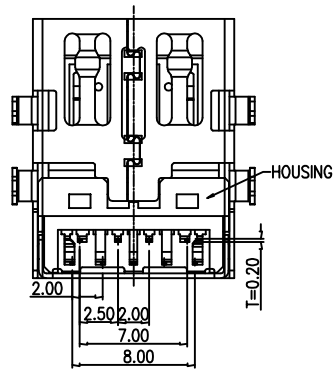

E

1 2 3 4 5 6 7

A

B

C

D

E

尚益科技有限公司 JMSCONN TECHNOLOGY CO., LTD.					
PROJ		SCALE : F DO NOT SCALE DWG	MOLD NO	20004-T-DD	
APP			MODEL	FILE NO	REV. X1
CHK					
DGN			UNIT	SHT 1 OF 1	SIZE A4
DRW	HSIEH	2014.12.09	MM		