



1 2 3 4 5 6 7

RoHS Compliant


A

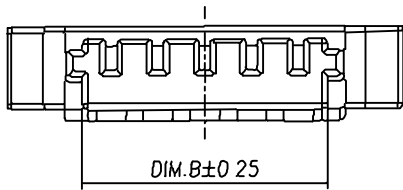


B

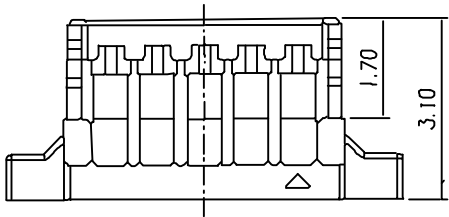

C

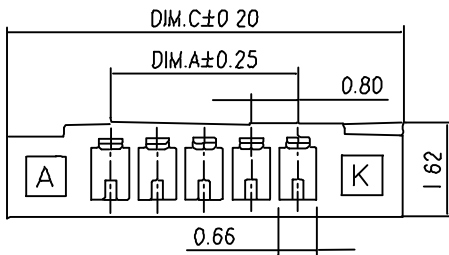

D



E

Specification

- 1. Current Rating: 0.5A AC/DC
- 2. Voltage Rating: 30V AC/DC
- 3. Contact Resistance: 20mΩ Max
- 4. Insulation Resistance: 100MΩ Min.
- 5. Withstand Voltage: AC200V/Minute
- 6. Operating Temperature: -25°C ~ +85°C

Material

1. Housing: Thermoplastic UL94V-0

Finish:  
1. Housing: White

Use With:

1. Terminal: 40080-5

Part No.: 40080-3-XX 3 2 B 0

No. Of Pin  
02 ~ 16, 20

Packing  
B: Bag

Housing Material  
3: Nylon46 UL94V-0

Housing Color  
2: White

PIN	DIM.A	DIM.B	DIM.C	PIN	DIM.A	DIM.B	DIM.C
02	0.80	1.80	4.40	10	7.20	8.20	10.80
03	1.60	2.60	5.20	11	8.00	9.00	11.60
04	2.40	3.40	6.00	12	8.80	9.80	12.40
05	3.20	4.20	6.80	13	9.60	10.60	13.20
06	4.00	5.00	7.60	14	10.40	11.40	14.00
07	4.80	5.80	8.40	15	11.20	12.20	14.80
08	5.60	6.60	9.20	16	12.00	13.00	15.60
09	6.40	7.40	10.00	20	15.20	16.20	18.80

尚益科技有限公司  
JMSCONN TECHNOLOGY CO., LTD.

PROJ		SCALE : F DO NOT SCALE DWG	MOLD NO	40080-3	
APP			MODEL	FILE NO	REV. X1
CHK			UNIT	SHT 1 OF 1	SIZE A4
DGN			MM		
DRW	HSIEH	2017.10.20			

1 2 3 4 5 6 7