


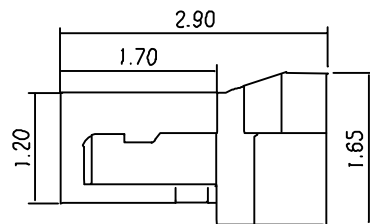


RoHS Compliant



SECTION A-A

Specification

- 1 Current Rating: 0.5A AC/DC
- 2 Voltage Rating 30V AC/DC
- 3 Contact Resistance: 20mΩ Max.
- 4 Insulation Resistance: 100MΩ Min.
- 5 Withstand Voltage: AC200V/Minute
- 6 Operating Temperature: -25 C ~ +85 C
- 7 Applicable Wire: AWG32
- 8 Insulation O.D.: $\phi 0.38 \pm 0.02$ mm

Material:

- 1 Housing: Thermoplastic UL94V-0
- 2 Contact Pin: Copper Alloy

Finish

- 1 Housing: Natural
- 2 Contact Pin: Gold Plated

Port No.: 40800-4-XX 1 1 B 0

No. Of Pin
02~10,12,14

Packing
B-Bag

Housing Material
1: NY66 UL94V-0

Housing Color
1: Natural

PIN	DIM.A	DIM.B	DIM.C	PIN	DIM.A	DIM.B	DIM.C
02	0.80	1.78	2.40	08	5.60	6.58	7.20
03	1.60	2.58	3.20	09	6.40	7.38	8.00
04	2.40	3.38	4.00	10	7.20	8.18	8.80
05	3.20	4.18	4.80	12	8.80	9.78	10.40
06	4.00	4.98	5.60	14	10.40	11.38	12.00
07	4.80	5.78	6.40				

尚益科技有限公司
JMSSCONN TECHNOLOGY CO., LTD.

PROJ		SCALE : F DO NOT SCALE DWG	MOLD NO 40080-4		
APP			MODEL	FILE NO	REV. X1
CHK			UNIT	SHT 1 OF 1	SIZE A4
DGN			MM		
DRW	HSIEH	2017.10.20			