

1 2 3 4 5 6 7


A
B
C
D
E

Features:

- 2 ~ 24 circuits available
- Material: LCP
- Tin-plated Brass Pin
- Mates with 40551-2xxHME Housing

Specification:

- Current rating: 5A AC, DC
- Voltage rating: 250V AC, DC
- Contact resistance: 10mΩ Max.
- Dielectric withstanding voltage: 1500V AC/minute
- Ambient temperature range: -25°C ~ 85°C

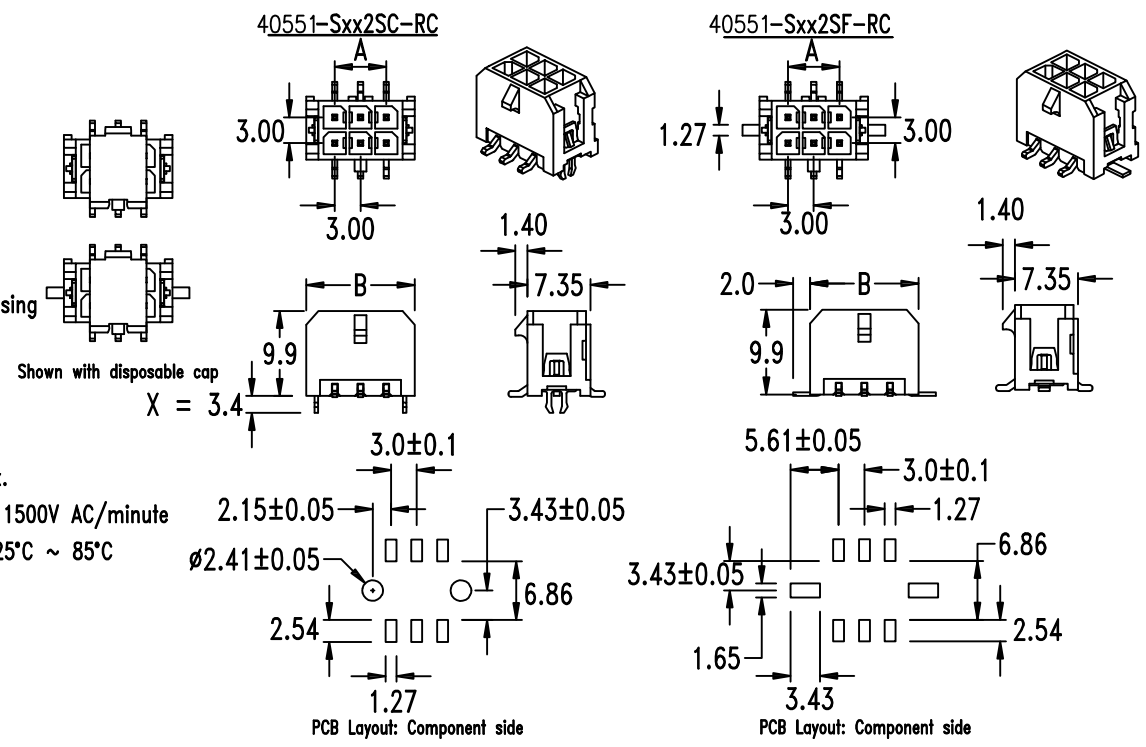

Dimensional Information

Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B
2		6.65	6	6.0	12.65	10	12.0	18.65	14	18.0	24.65	18	24.0	30.65	22	30.0	36.65
4	3.0	9.65	8	9.0	15.65	12	15.0	21.65	16	21.0	27.65	20	27.0	33.65	24	33.0	39.65


P N : 40551 - S x x 2 S x - R C

Serial Type _____ C: With Cap
 S: SMT Type _____ R: Tape & Reel
 No. of Contact _____ C: With Solderable Retention Clip
 02~24 PIN _____ Dim. X 3.4
 2: Dual Row _____ F: With Solderable Fitting Nail
 S: Vertical Type _____

TOLERANCE
 000 ± 0.05 (mm)
 00 ± 0.15 (mm)
 0 ± 0.25 (mm)

尚益科技有限公司 JMSCONN TECHNOLOGY CO., LTD.					
PROJ		SCALE : F	MOLD NO		
APP		DO NOT SCALE DWG	40551-2SM		
CHK			MODEL	FILE NO	REV. X1
DGN			UNIT	SHT 1 OF 1	SIZE A4
DRW	HSIEH	2015.01.29	MM		

1 2 3 4 5 6 7

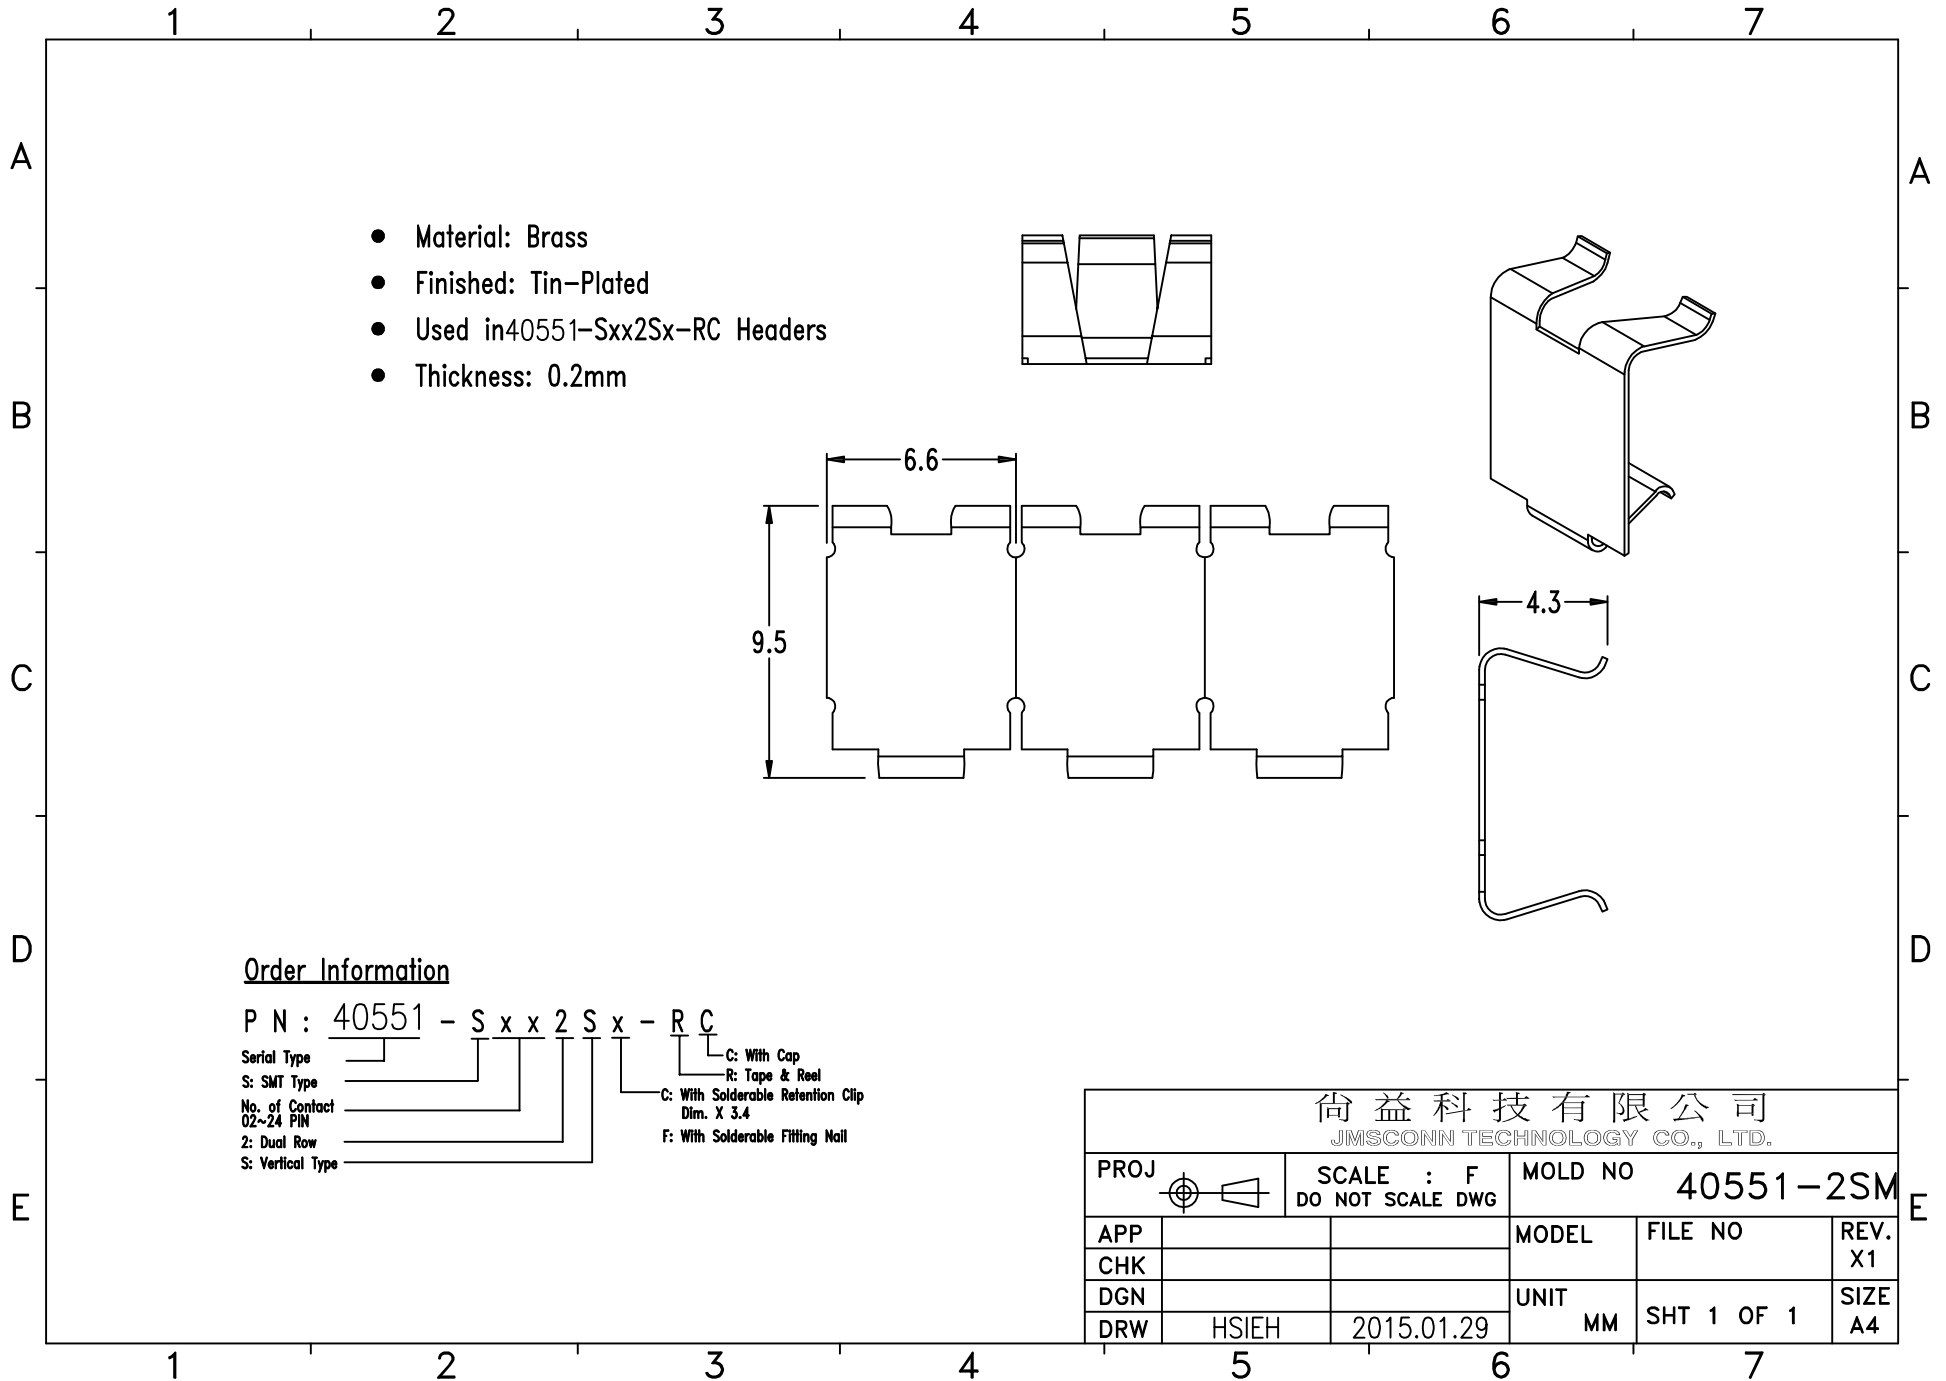

- Material: Brass
- Finished: Tin-Plated
- Used in 40551-Sxx2Sx-RC Headers
- Thickness: 0.2mm

Order Information

P N : 40551 - S x x 2 S x - R C

Serial Type: S
 S: SMT Type
 No. of Contact: 02~24 PIN
 2: Dual Row
 S: Vertical Type

C: With Cap
 R: Tape & Reel
 C: With Solderable Retention Clip Dim. X 3.4
 F: With Solderable Fitting Nail

尚益科技有限公司 JMSSCONN TECHNOLOGY CO., LTD.				
PROJ		SCALE : F DO NOT SCALE DWG	MOLD NO 40551-2SM	
APP			MODEL	FILE NO
CHK				REV. X1
DGN			UNIT	SIZE
DRW	HSIEH	2015.01.29	MM	SHT 1 OF 1 A4